


# Fanvil i60 Video Door Phone

## Overview

The i60 Video Door Phone integrates access control, intercom, and security into a slimline unit. Easily installed and IP65-rated, it ensures robust performance indoors and outdoors. A 2MP camera and speed-dial button enable clear, instant video calls, while flexible access methods streamline entry management. Compatible with SIP and ONVIF, the i60 fits seamlessly into existing systems, providing reliable solutions for villas, apartments, and residential communities.

## Features

-  Speed-dial button for instant calling
-  2MP HDR camera delivers clear and detailed imaging
-  IP65-rated for reliable performance in extreme environments
-  Versatile interfaces for seamless security system integration
-  Onvif ONVIF-compliant for high flexibility and compatibility

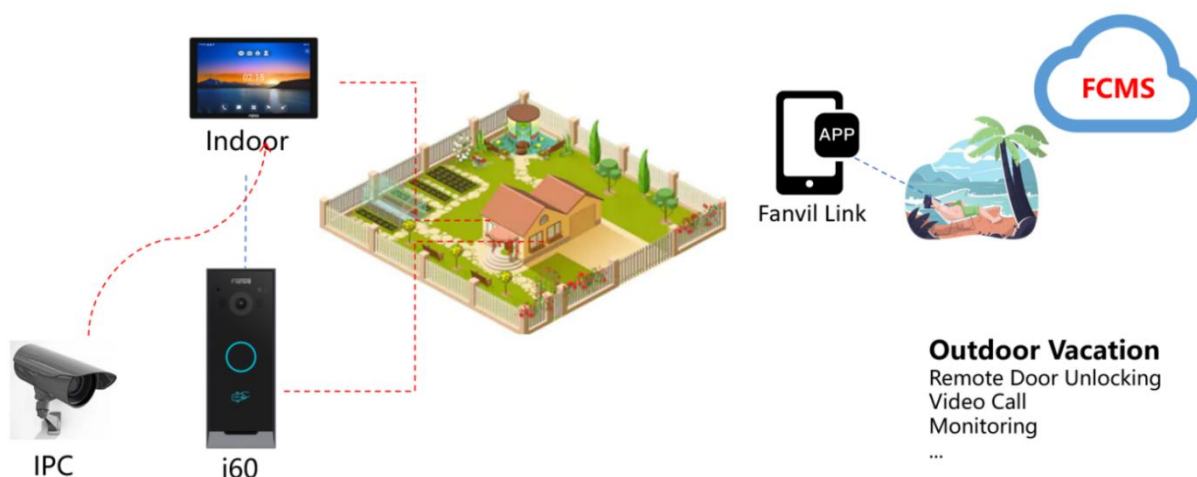

## Specification

|                              |                                                                                                                                                                      |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applications</b>          | Residential communities, apartment buildings, villas                                                                                                                 |
| <b>Keypad</b>                | 1 speed-dial button                                                                                                                                                  |
| <b>Casing Material</b>       | ABS + PC                                                                                                                                                             |
| <b>Color</b>                 | Panel: black;<br>Housing: gunmetal gray                                                                                                                              |
| <b>Image Sensor</b>          | 1/2.9" CMOS                                                                                                                                                          |
| <b>Camera</b>                | 2MP                                                                                                                                                                  |
| <b>FOV</b>                   | 100° (horizontal), 57° (vertical), 140° (diagonal)                                                                                                                   |
| <b>Video Codec</b>           | H.264 (baseline profile, main profile)                                                                                                                               |
| <b>Min. Illumination</b>     | 0.1 Lux, IR illumination supported                                                                                                                                   |
| <b>Card Capacity</b>         | 10,000                                                                                                                                                               |
| <b>Power Consumption</b>     | PoE: 1.63–6.93 W;<br>Power adapter: 1.51–6.16 W                                                                                                                      |
| <b>Power Supply</b>          | 12 VDC, 1 A;<br>PoE: 802.3af Class 3                                                                                                                                 |
| <b>Operating Temperature</b> | –40 °C to +70 °C (–40 °F to +158 °F)                                                                                                                                 |
| <b>Storage Temperature</b>   | –40 °C to +70 °C (–40 °F to +158 °F)                                                                                                                                 |
| <b>Product Dimension</b>     | 50.0 mm × 30.0 mm × 130.0 mm (1.97" × 1.18" × 5.12") (L × W × H)                                                                                                     |
| <b>Protection Rating</b>     | IP65                                                                                                                                                                 |
| <b>Installation</b>          | Wall mounting with a bracket or rain cover                                                                                                                           |
| <b>Gross Weight (G.W)</b>    | 0.35 kg                                                                                                                                                              |
| <b>Package Dimensions</b>    | Gift box: 171.0 cm × 85.0 cm × 54.0 cm (67.32" × 33.46" × 21.26") (L × W × H);<br>Outer CTN: 365.0 cm × 295.0 cm × 198.0 cm (143.70" × 116.14" × 77.95") (L × W × H) |
| <b>QTY/CTN</b>               | 20 pcs                                                                                                                                                               |

## Functions

|                             |                                                                                               |
|-----------------------------|-----------------------------------------------------------------------------------------------|
| <b>Supported Protocols</b>  | SIP 2.0 over UDP/TCP/TLS                                                                      |
| <b>Access Methods</b>       | IC card, BLE, DTMF code, App                                                                  |
| <b>Interfaces</b>           | 2 short-circuit inputs;<br>1 short-circuit output;<br>1 Wiegand interface (26/34)             |
| <b>ONVIF</b>                | Profile S                                                                                     |
| <b>Card Types</b>           | MIFARE Classic 1K/4K, MIFARE DESFire, MIFARE Ultralight, MIFARE Plus;<br>Frequency: 13.56 MHz |
| <b>Talking Mode</b>         | Full-duplex (HD audio)                                                                        |
| <b>Additional Functions</b> | Built-in relay, motion detection, tamper alarm, TF card, open API                             |