

3-party conference

- 1.Once in line with 1st caller, press Conf soft key, 1st caller is put on hold.
- 2.Then call the 2nd number.
- 3.After, 2nd call is established, press Conf soft key to set up the conference.

Call transfer

Attended transfer:

- 1.Press XFER soft key during the active conversation, the call is put on hold.
- 2.Dial the second telephone number.
- 3.When the call is answered, then press XFER soft key to complete the operation.

Blind transfer:

- 1.Press XFER soft key during the active conversation, the call will be on hold.
- 2.Then enter the 2nd telephone number and press XFER soft key.

Call forward

- 1.Press Menu > 2 Features > 1 Call Forward.
- 2.Select the line, the type of forward, enter the destination number and status and Save.

Call Mute

- 1.Press  to Mute the microphone during the call.
- 2.Press  again to un-mute the conversation.

Call list

- 1.Press History soft key or Menu > 6 Call Logs > 1 Local Call Logs
- 2.Scroll through the list using for Prev. or Next soft or 
- 3.To dial an entry, press Dial soft key or pickup handset or press  or step on the foot switch.

Phonebook

Access phonebook:

- 1.Press Dir soft key.
- 2.Select Contacts.
- 3.To dial an entry, press Dial soft key or press  or step on the foot switch.

Add new entry:

- 1.Press Dir soft key > 1 Contacts> Press Add.
- 2.Enter name and number and press Save soft key.

Redial


- 1.Press Redial soft key, select the desired call and press Dial soft key or press , or step on the foot switch.

Do not disturb


- 1.Press DND soft key, or Menu > 2 Features > 5 DND.
- 2.Select the Mode and Type, and press Save soft key.

Voice mail

- 1.To access your voice mailbox, press or Menu > 4 Applications > 3 Voice Message, number of messages will be indicated if provided by your server or pbx.
- 2.Select the line and press Dial to call.



X2P



X2C/X2CP

X2P / X2C / X2CP Quick Installation Guide

Fanvil Technology Co., Ltd

Website: www.fanvil.com

E-Mail: sales@fanvil.com support@fanvil.com

Tel: +86-755-2640-2199 Fax: +86-755-2640-2618


Add: 13th Floor, Building 2, Runzhi R&D Center, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China

Fanvil Technology Co., LTD.

www.fanvil.com

P/N:CJBA100024B0


Packaging list

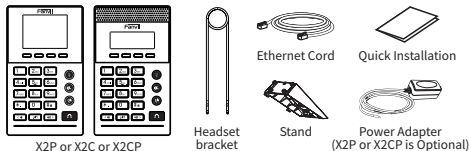

Screen icon




Keys features

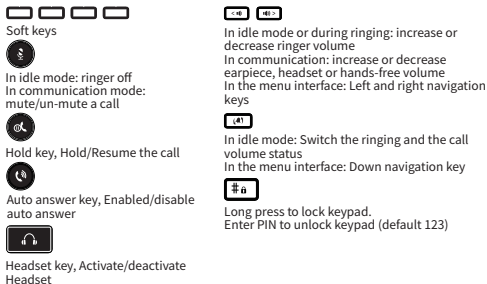

Installation the device


Bracket installation



Connecting to the Device

Please connect power adapter, network, PC, headset, and foot switch to the corresponding ports as described in below picture.

- ① Power port: connect the power adapter.
- ② PC port: the network port connect to the computer.
- ③ Network port: connecting local area network or internet.
- ④ Foot switch port: connecting foot switch.
- ⑤ Headset port: connect headset.
- ⑥ Monitor port: connection monitoring headset (no microphone)



Configuration

Configuration via Phone

1. Press Menu > 3 Setting > 2 Advanced Settings (Default password 123)
2. Select Network: To configure the Network Settings (DHCP/Static/PPPoE)
3. Select Accounts: To configure enable the account, fill the SIP server address, port, user name, password etc.

Configuration via Web

1. Get the IP address from the phone: Press Menu > 1 Status > 2 IP.
2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment (The default username and password are both 'admin').
3. Configure: Select network/Account etc, and fill the relevant content.

Language setting

1. Press Menu key > 3 Settings > 1 Basic Settings > 7 Language.
2. Select the desired language and press Save soft key.

Making a call

1. **Pre-dialing:** enter the phone number and press
2. **Direct dialing:** press and enter the phone number.
3. **Headset:** enter phone number and press or vice versa.

Accepting a call

1. With a headset: or step on the foot switch.

Putting a call on hold

1. Press key or Hold soft key, caller is put on hold.
 2. To retrieve the call press key or Resume soft key.
- Note: with more than one active call, select desired call with the key and use the corresponding soft key to hold or resume.